


S-218-200D SERIES PUMP

single acting

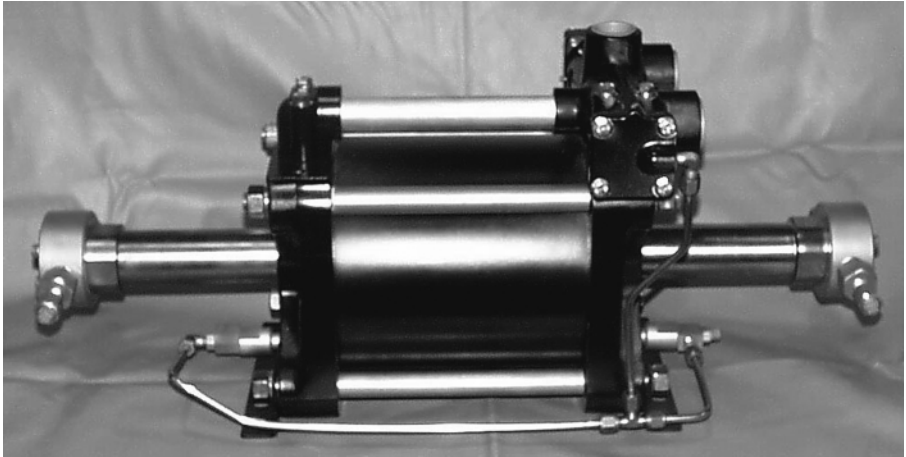

S-218-200D DOUBLE ENDED, SINGLE ACTING, AIR-DRIVEN HYDRAULIC PUMP

The TR/S S-218-200D air-driven, double ended pump produces high pressure liquid flows up to 2-1/2 gallons per minute and pressures up to 20,000 psig.

The pump services water, oil and compatible chemicals.

Features
Has fewer moving parts and seals than comparable pumps...thus less maintenance. Safe for use in hazardous areas...no electrical connections.

Pump ideal for hydrostatic testing or water jetting applications.

| DISCHARGE CAPACITY—CUBIC INCHES (liters) PER MINUTE—APPROXIMATE Based on 350 SCFM of driving air at 100 psi (9.9 Std. Cu. Meters driving air at 6.9 bars) | | | | | | |
|--|--------------------|--------------------|--------------------|---------------------|----------------------|----------------------|
| Pump Model No. | DISCHARGE PRESSURE | | | | | |
| | 0 psi (0 bar) | 4000 psi (276 bar) | 8000 psi (552 bar) | 12000 psi (828 bar) | 16000 psi (1104 bar) | 20000 psi (1380 bar) |
| S-218-200D (200:1 ratio) | 525 (8.60) | 510 (8.36) | 470 (7.70) | 375 (6.15) | 230 (3.77) | — |

| Model Numbers | S-218-GJC Pump (200D) |
|---------------------|--------------------------|
| Length: | 28.5 in. (72.4 cm) |
| Width: | 10-5/8 in. (27.0 cm) |
| Height: | 12-1/2 in. (31.8 cm) |
| Air Inlet Port: | 1 NPT |
| Liquid Inlet Port: | 1/2 NPT |
| Liquid Outlet Port: | 9/16-18 NBS (3/8 in. OD) |
| Shipping Weight: | 85 lbs. (38.6 kg) |
| Reference: | 94024-217 |

S-218-200D

